

www.geo-drilling.com

gds

made in USA

**The Water-Powered
Down-The-Hole Hammer**

WAI 35

- Excellent drilling speed
- Long lifetime
- Extraordinary drilling stability, small drilling deviations
- Environmentally friendly, operation only with water (no oil etc.)
- Significant reduction of energy consumption
- No dust formation, therefore preferred use in tunnel construction or in urban areas
- Different drill bit design available, adapted to the geological conditions
- Fast availability of hammers and spare parts
- Low spare part costs
- Technical support



tds ®

www.tunnel-drilling.com

www.geo-drilling.com

www.tunnel-drilling.com

gds

made in USA

The Water-Powered Down-The-Hole Hammer **WAI 35**

Technical data

- Standard drilling bit Ø 90 mm - 105 mm
- Working pressure: 60 - 170 bar (900 - 2450 psi)
- Required amount of water (hammer new): 75 - 150 l/min
- Required amount of water (hammer used): 170 - 300 l/min
- Impact frequency: up to 3600 impacts/min
- Feed force (formation-related): 7000 - 10500 N
- Rotation speed: 60 - 95 rpm
- Torque (formation-related): 800 - 1500 Nm


Dimensions

- Length: 978 mm
- Diameter: 89 mm (3,5")
- Weight: 35 kg

Contact

Stenhuggarvägen 7B
SE-132 38 Saltsjö-Boo
Sweden

tel: +46 (0) 70 887 5004
robert.hansson@geo-drilling.com

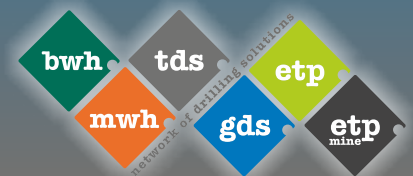

gds geo drilling solutions ab

 **DrillKing**